

DIGITAL, PROGRAMMABLE, PLUG & PLAY,

IGBT DRIVER

**2IPSE3W17-60**

FOR MEDIUM AND HIGH POWER IGBTs

**D A T A S H E E T**

InPower Systems GmbH


Am Kornfeld 11  
D-86932 Pürgen, Germany  
Tel: +49-(0)8196-93000  
Fax: +49-(0)8196-930020  
Email: [info@inpower-sys.com](mailto:info@inpower-sys.com)  
VAT-Id: DE 221021830

Prepared by: M. Wendt  
Approved by: P. Kviz  
Date of publication: July 2010  
Revision: 1.2  
Status: production


---

## 1. MAIN FEATURES

- Dual channel for dual- and multilevel topology
- Smart switching with variable gate resistors
- Tuned according to the application
- Reliable protection against
  - over-current in all short circuit conditions
  - over-voltage during turn-off
- Advanced control and protection functions
  - desaturation monitoring
  - di/dt monitoring
  - feedback clamping with active function
  - multiple soft shut down
  - supply voltage monitoring
  - digital input filter for switching signals
- DC/DC converter included
- Cable connection for every type of IGBT module

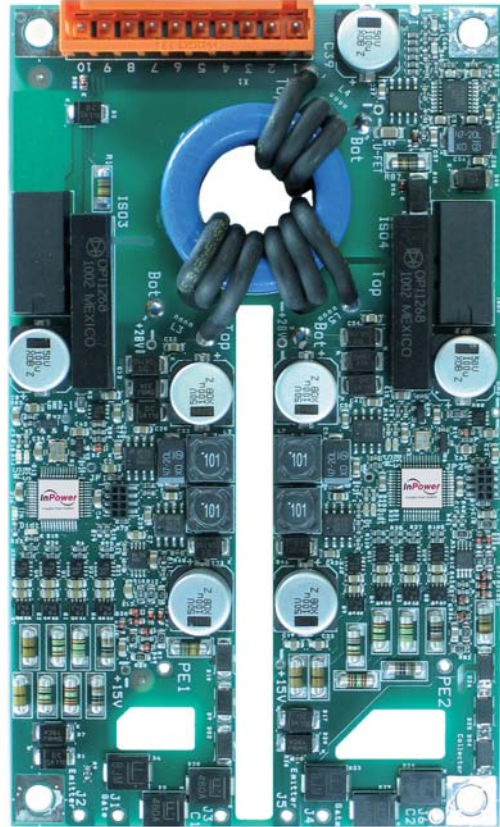

## 2. MECHANICAL DIMENSIONS

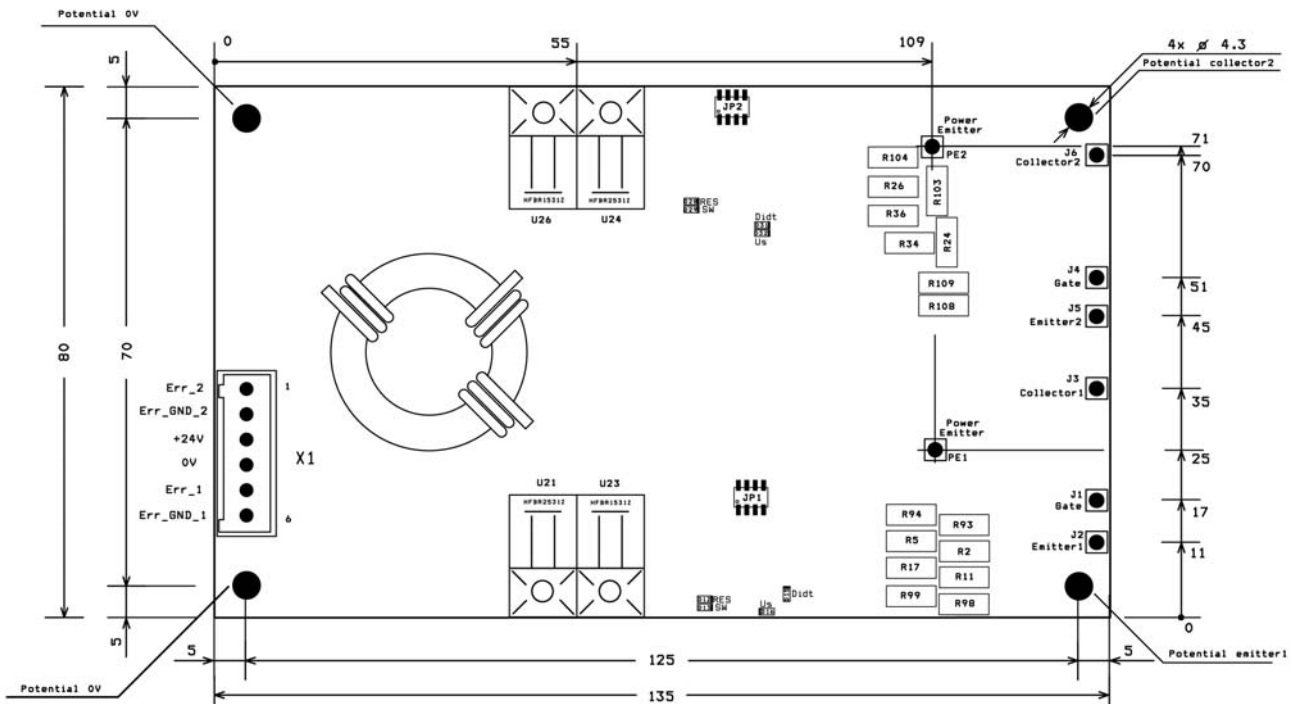

## 3. KEY DATA

Parameter	Symbol	Value (at +25°C)
Max. collector-emitter voltage	$V_{CE}$	1700V
Input supply voltage range	$V_{DC}$	+14 to +30V
Output voltage: ON/OFF voltage	$V_{ON/VOFF}$	$\pm 15V$
Isolation testing voltage ( $V_{AC}$ RMS 50Hz / 1 min)	$V_{ISOL}$	6000V
Switching frequency (max.)	$f_{S\ max}$	120kHz
Peak output current	$I_G$	$\pm 70A$
Peak output power	$P_{DC/DC}$	3W
Quiescent current typically (at 15V)	$I_{DC}$	0.25A
Quiescent current typically (at 24V)	$I_{DC}$	0.16A
Max. input current at max. load (at 15V)	$I_{DC\ max}$	0.65A
Max. input current at max. load (at 24V)	$I_{DC\ max}$	0.52A
Coupling capacitance primary/secondary side (max.)	$C_{io}$	2pF
Switching frequency of isolated converter	$f_{SMP\ max}$	0.5MHz
Creepage distance (primary-secondary side)		>16mm
Creepage distance (secondary LOW – secondary HIGH)		>16mm
Frequency of logic controller	$f$	20MHz
Operating temperature (measured on driver surface)	$T_{OP}$	-40 to +85°C
Storage temperature	$T_{ST}$	-40 to +85°C
Turn-on / Turn-off delay time	$t_{pdON} / t_{pdOFF}$	400nsec
Typical time of soft shut down	$t_{SSD}$	1-2 $\mu$ sec
Max. system time between fault detection and error notification	$t_{SYS}$	100nsec
Time between detection of desaturation and gate voltage falling edge	$t_{pDES}$	300nsec
Time between detection of desaturation and gate voltage falling edge	$t_{pDES}$	300nsec
Input driving and output error signal	electrical	
Recommended input (optocoupler) current	$I_O$	20mA
Max. input (optocoupler) current	$I_O\ max$	50mA

## 4. INTERFACES

Interface	Part Type	Remarks
Optical Receiver	HFBR-2531Z (Avago)	For suitable connectors see <a href="http://www.avagotech.com">www.avagotech.com</a>
Optical Transmitter	HFBR-1531Z (Avago)	
DC supply on PCB	FKC 2,5/2-STF-5,08 (Phoenix )	Connector: MSTBV 2,5/2-GF-5,08 (Phoenix)

## 5. CABLE LENGTH

Max. length of coaxial cable: 30cm. Max. length of simple cable: 7cm. For gate and auxiliary emitter connections use coaxial cable RG58 C/U with auxiliary emitter connected to the shielding. For power emitter and auxiliary collector it is recommended to use HV isolation cable, for instance Radox 9 GKW-AX, 1.5mm<sup>2</sup>.